

# HSL 系列 Series

## 特点 Features

- 7mm高，微型体积。Be 7mm in height and mini-size.
- 为VTRs、汽车音响、汽车立体声、微型收录机、微型计算器等设计。  
Designed for use in VTRs, car radios, car stereos, micro-cassette tape recorders, pocket calculators and watches.
- RoHS指令已对应完毕。Adapted to the RoHS directive.




## 主要技术性能 Specifications

项目 Item	特性 Performance Characteristics						
使用温度范围 Operating Temperature Range	-40~+85°C						
额定电压范围 Rated Voltage Range	6.3~50V						
标称电容量范围 Nominal Capacitance Range	0.1~470μF						
标称电容量允许偏差 Capacitance Tolerance	±20% (120Hz, +20°C)						
漏电流 Leakage Current	$I \leq 0.01CV$ or $3(\mu A)$ 2分钟(at 20°C, after 2 minutes) 取较大者(whichever is greater)						
损耗角正切值 (tgδ) Dissipation Factor (+20°C, 120Hz)	$U_r(V)$	6.3	10	16	25	35	50
	$\text{tg}\delta$	0.22	0.20	0.16	0.14	0.12	0.10
温度特性Temperature Characteristics (Impedance ratio at 120Hz)	$U_r(V)$	6.3	10	16	25	35	50
	Z-25°C / +20°C	4	3	2	2	2	2
	Z-40°C / +20°C	8	6	4	4	3	3
耐久性 Load Life	+85°C加额定电压2000小时, 恢复16小时后: After applying rated voltage for 2000 hours at +85°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±25% initial measured value 漏电电流 Leakage current : ≤ initial specified value 损耗角正切值 Dissipation factor : ≤ 2倍初始规定值 ≤ 2times of the initial specified value						
高温贮存 Shelf Life	+85°C, 1000小时贮存后, 恢复16小时后: After storage for 1000 hours at +85°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±25% initial measured value 漏电电流 Leakage current : ≤ 2倍初始规定值 ≤ 2times of the initial specified value 损耗角正切值 Dissipation factor : ≤ 2倍初始规定值 ≤ 2times of the initial specified value						

## 频率修正系数 Frequency Coefficient

CAP(uF)	F(Hz)	60	120	1K	≥10K
0.1~68	0.8	1	1.3	1.5	
100~470	0.8	1	1.15	1.2	

## 外形图及尺寸表 Case Size Table

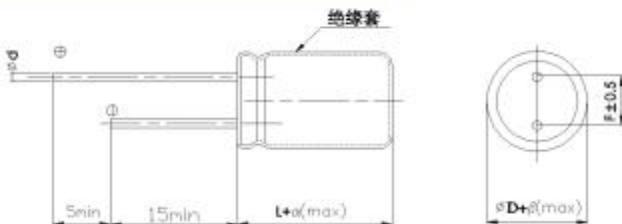

单位 Unit: mm				
D	4	5	6.3	8
F	1.5	2.0	2.5	3.5
d	0.45		0.5	
$\alpha(\max)$		L < 9, $\alpha=1$ ; L=9, $\alpha=1.5$		
$\beta(\max)$		0.5		

## 尺寸 Dimensions

WV		6.3V(0J)		10V(1A)		16V(1C)		25V(1E)		35V(1V)		50V(1H)		
		CAP(μF)	Size	Ripple	Size	Ripple								
0.1	0R1												4x7	1.0
0.22	R22												4x7	2.3
0.33	R33												4x7	3.5
0.47	R47												4x7	5.0
1	010												4x7	10
2.2	2R2												4x7	19
3.3	3R3												4x7	24
4.7	4R7												4x7	28
10	100						4x7	28	4x7	28	4x7	31	5x7	38
22	220	4x7	34	4x7	35	4x7	39	5x7	48	5x7	52	6.3x7	58	
33	330	4x7	40	4x7	43	4x7	45	5x7	58	6.3x7	80	8x7	75	
						5x7	59						8x9	85
47	470	4x7	48	4x7	45	5x7	65	6.3x7	71	8x7	85	8x9	101	
				5x7	49					8x9	96			
100	101	5x7	78	5x7	74	6.3x7	98	8x7	115	8x7	110			
				6.3x7	87	8x7	125	8x9	130	8x9	141			
220	221	6.3x7	120	6.3x7	138	8x7	140							
				8x7	145	8x9	186							
330	331	8x7	180	8x7	201									
		8x9	204											
470	471	8x7	215											
		8x9	243											

Size φ D×L(mm)

Maximum Allowable Ripple Current (mA rms) at 85 °C 120 Hz